


12'x40' Blast Resistant Modular Trailers

- Blast Rating - 8PSI, 200ms, High Response
- Exterior Electrical Area Classification - Class 1, Division 2
- Service Entry Disconnect - 100Amp Non-fused, 120/240 Volt, 1 Phase. 3 Wire, 60 Hertz Service
- HVAC - 36,000 BTU/10kW Electric Heat, Designed For 208-230 Volt 1 Phase, 60 HZ
- 4 Top Mounted Lifting Lugs, Non-Skidded
- Manual Safe Haven System

ATCO

always there. anywhere.

12'x40' BRM Office Trailer

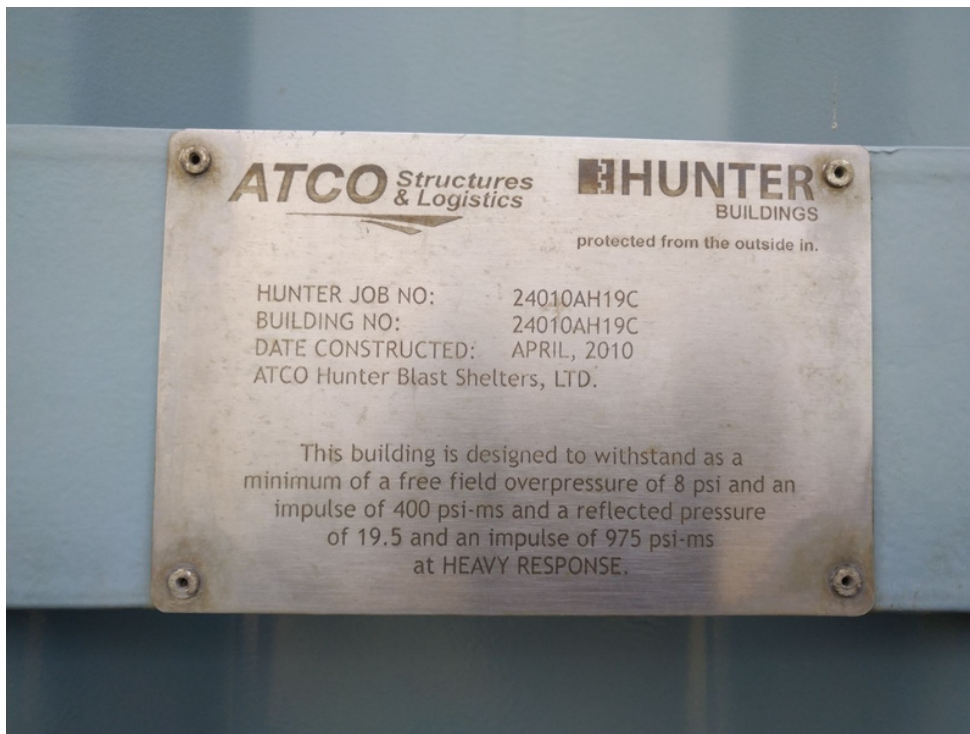

12'x40' BRM Office Trailer

